


Model EVMU / EVMUG / EVMUI

Features

- Standard NEMA motors
- Integral thrust bearing on 5 HP and larger pumps to handle axial thrust loads
- Air vent in casing cover allows proper venting preventing air entrapment and dry run
- Liner ring is a self-aligning, floating design constructed to prevent swelling at high temperatures
- Tungsten carbide lower pump bearings and sleeves are standard construction for all services, providing maximum operating life
- Direct drive pump and motor shafts are keyed for positive, reliable power transmission with no adjustments necessary
- "Flexible" floating outer casing allows for thermal expansion in hot water applications, preventing deformation due to pressure fluctuations
- Anti-erosion measures a dish-shaped insert is fitted to the intermediate casing designed to promote smooth flow and prevent high velocity areas that accelerate erosion
- Square-edge six spline shaft (EVMU 3-18) or twelve spline shaft (EVMU 32-64) provides positive location and drive of impellers eliminating wear
- Dimensions & flanges installation is to market accepted dimensions for easy upgrade of existing installations
- Mechanical seal Silicon/Carbon/Viton mechanical shaft seal; cartridge seal standard on Models 32, 45, and 64
- Positive Sealing O-rings between intermediate casings provide positive sealing

EVMU, EVMUG, EVMUL selection chart

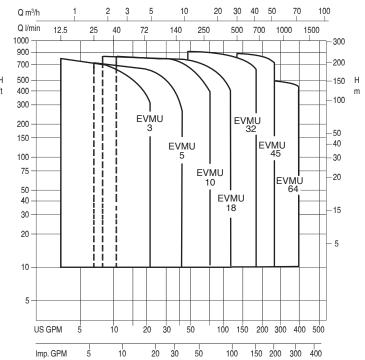

Applications

- · Water supply systems
- · Reverse osmosis
- Water Boosting
- Washing systems
- Fire fighting
- · Water treatment
- Plants
- Boiler feed
- Jockey pump services
- · Hot & cold water
- Circulation
- Irrigation
- Sprinkler systems
- Filtration
- Heat exchangers

Model Description

ModelConstructionEVMU 3-18304 SSEVMUG 32-64304SS/Cast IronEVMUL 3-64316SS



*Note: NSF/ANSI 61 Annex G listed models: EVMU3-18, EVMUL all models 3-64



EBARA Fluid Handling