

**EBARA**  
**W**  
**EBARA**



# Water | Wastewater Pumps

Commercial  
Industrial  
Municipal



**EBARA** Fluid Handling

*an EBARA International Corporation company*



# EBARA Fluid Handling



EBARA Fluid Handling (EFH), the US sales and service subsidiary of EBARA Corporation, Japan, provides engineered pump, pump products and related services for the water, wastewater, commercial, municipal, energy and power industries offering reliable product knowledge, application expertise and responsive support including aftermarket replacement parts services.

With horsepower ranges up to 800 HP and capacities to 35,000 GPM, EFH's cast iron submersible pumps meet a wide range of industrial, municipal, flood control, and residential water and wastewater applications. The cast iron line of pumps includes submersible sewage, submersible sump, semi-vortex, vortex, grinder, non-clog, and dry pit models.



EFH offers a comprehensive line of corrosion resistant formed stainless steel pumps that include end suction centrifugal, multistage, and submersible sump, effluent, and sewage pumps.

EBARA Fluid Handling maintains inventory that allows it to assemble, test, and ship ½ to 150 HP cast iron submersible pumps in 5 to 14 working days, and as well, offer a 24-hour Quick Ship program on most stainless steel pumps and parts. The Rock Hill facility includes a new 81,000 gallon computer-aided testing area capable of handling large-scale pump models both in wet and dry pit configurations up to 350 HP.




EBARA pump service and parts are available through an extensive service network throughout North America to assist customers in replacement of parts or complete pumps and motors.

Recognizing the continued strain on water and wastewater facilities and infrastructures with increased maintenance, energy, and environmental demands and costs, EBARA Fluid Handling strives to deploy the best water, wastewater pumps, pump products, and technologies to meet these requirements.





# ***EBARA Corporation***

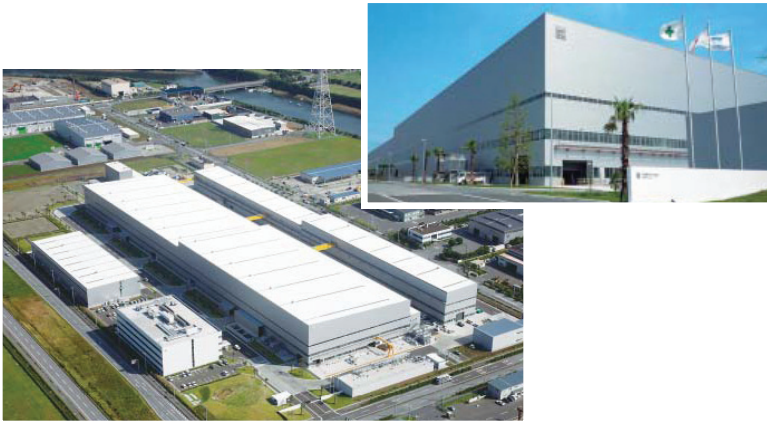

Founded in 1912, EBARA Corporation is recognized as a world leader in the design, development and manufacture of industrial machinery with a predominant focus on the production of pumps, pumping systems and compressors for a wide range of applications. Today, EBARA Corporation operates 104 subsidiaries and 15 affiliate companies in 17 countries and now operates three principal business groups including Fluid Machinery and Systems, Environmental Engineering and Precision Machinery.

Through Environmental Engineering, EBARA provides a full range of services from engineering, project design and construction to operation and maintenance for solid waste treatment, water treatment, gasification, incineration and other facilities. The Precision Machinery business produces semiconductor manufacturing equipment and is developing its position in the chemical mechanical polishing systems, dry vacuum pumps and high-precision technologies.

The variety of pump types and sizes produced by the EBARA Fluid Machinery and Systems Group, EBARA's original core business, is tremendous ranging from fractional horsepower recirculation pumps to vertical mixed flow pumps with horsepower's into the thousands. EBARA's engineering and manufacturing capabilities are best demonstrated by the Futtsu manufacturing plant. The plant is focused on the production of high pressure, large scale pumps and systems targeting specific applications in oil and gas, nuclear power, water and wastewater infrastructure industries with full modern test capacity to 5,000,000 GPM.


EBARA's Fujisawa plant is one of the most technologically advanced manufacturing plants for the mass production of small size pumps; including the D-series of cast iron pumps, as well as refrigerating machines, fans, blowers and boiler systems.


Standard pump products are manufactured in Italy, Brazil, China, Taiwan and other global locations and then locally assembled and tested to specific customer specifications and requirements.


EBARA blends superior engineering expertise with state of the art production techniques to produce pumps of unsurpassed quality and long life. Ebara remains the largest single brand pump company in the world and strives to develop high quality, efficient products and key system components for addressing improvements and solutions in the fields of water supply, energy and environmental issues.




# Commercial

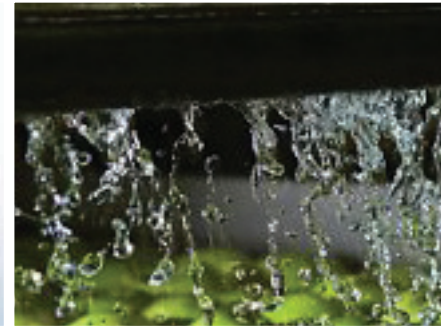



Model CDU *, CDX		End suction centrifugal	
	Specifications	Applications	
	Suction Size:	1 1/4" to 1 1/2"	<ul style="list-style-type: none"> <li>• Irrigation</li> <li>• Plant services</li> <li>• Liquid transfer</li> <li>• Water supply systems</li> <li>• Ultrapure water systems</li> <li>• Air conditioning systems</li> <li>• Water reclamation and treatment</li> </ul>
	Discharge Size:	1"	
	Range of HP:	to 3 HP	
	Capacity:	to 95 GPM	
	Head:	to 245 ft.	
	Liquid:	Clean water	

Model 3U *		End suction centrifugal	
	Specifications	Applications	
	Suction Size:	2" to 3"	<ul style="list-style-type: none"> <li>• Irrigation</li> <li>• Plant services</li> <li>• Liquid transfer</li> <li>• Water supply systems</li> <li>• Ultrapure water systems</li> <li>• Air conditioning systems</li> <li>• Water reclamation and treatment</li> </ul>
	Discharge Size:	1 1/4" to 2 1/2"	
	Range of HP:	to 30 HP	
	Capacity:	to 750 GPM	
	Head:	to 250 ft.	
	Liquid:	Clean water	

Model JEU *		Self-priming jet pump	
	Specifications	Applications	
	Suction Size:	1 1/4"	<ul style="list-style-type: none"> <li>• Plant services</li> <li>• Pressure boosting</li> <li>• Water supply systems</li> <li>• Ultrapure water systems</li> <li>• Water reclamation and treatment</li> <li>• Aqueous cleaning</li> </ul>
	Discharge Size:	1"	
	Range of HP:	to 1 1/2 HP	
	Capacity:	to 18.5 GPM	
	Head:	to 190 ft.	
	Liquid:	Clean water	



\* NSF/ANSI 61 Annex G listed models: CDU, 3U, JEU

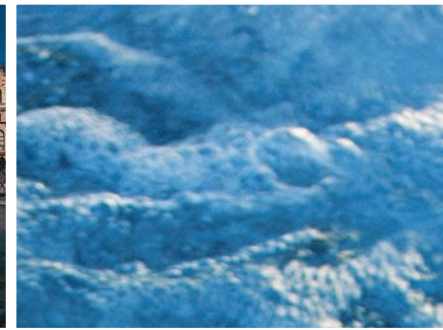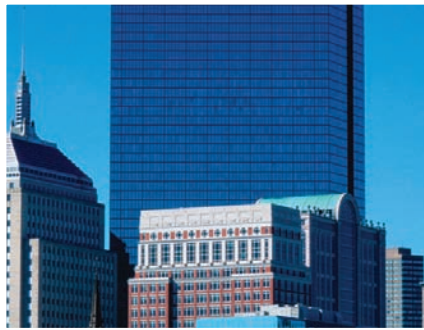

# Commercial

## Model 2CDXU, 2CDU \*

## 2-stage end suction centrifugal



### Specifications

Suction Size:	1¼" to 1½"
Discharge Size:	1"
Range of HP:	¾ to 5 HP
Capacity:	to 65 GPM
Head:	to 245 ft.
Liquid:	Clean water

### Applications

- Plant services
- Liquid transfer
- Reverse osmosis
- Water supply systems
- Ultrapure water systems
- Water reclamation and treatment
- OEM equipment application

## Model DWO

## Open impeller end suction centrifugal



### Specifications

Suction Size:	2" to 2½"
Discharge Size:	2"
Range of HP:	1.5 to 4 HP
Capacity:	to 250 GPM
Head:	35 to 65 ft.
Liquid:	suitable for suspended solids in dirty water to ¾" (spherical)

### Applications

- Plant services
- Food Process
- Beverage Process
- Dirty liquid handling
- OEM equipment application
- Water reclamation and treatment

## Model EVMU \*, EVMUL \*, EVMUG

## Vertical multistage



### Specifications

Suction Size:	1¼" to 4"
Discharge Size:	1¼" to 4"
Range of HP:	to 50 HP
Capacity:	to 390 GPM
Head:	to 930 ft.
Liquid:	Clean water

### Applications


- Boiler feed
- HVAC
- Filtration
- Reverse osmosis
- Washing systems
- Fire fighting
- Filtration
- Irrigation
- Pressure/water boosting
- Hot/cold water circulation



\* NSF/ANSI 61 Annex G listed models: 2CDU, EVMU 3-18, EVMUL 3-64




# Water/Wastewater/Commercial

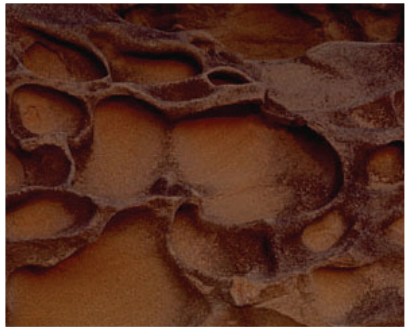



Model EPD, Optima		Sump, drainage										
	Specifications	Applications										
	<table border="1"> <tr> <td>Discharge Size:</td> <td>1" to 1½"</td> </tr> <tr> <td>Range of HP:</td> <td>to 1½ HP</td> </tr> <tr> <td>Capacity:</td> <td>to 86 GPM</td> </tr> <tr> <td>Head:</td> <td>to 61 ft.</td> </tr> <tr> <td>Max. solid diameter:</td> <td>¾"</td> </tr> </table>	Discharge Size:	1" to 1½"	Range of HP:	to 1½ HP	Capacity:	to 86 GPM	Head:	to 61 ft.	Max. solid diameter:	¾"	<ul style="list-style-type: none"> <li>• Drainage (<i>basements, sumps, excavation</i>)</li> <li>• Seepage (<i>residential, commercial, industrial</i>)</li> <li>• Effluent and containment transfer</li> <li>• Emptying (<i>pools, water storage structures</i>)</li> </ul>
Discharge Size:	1" to 1½"											
Range of HP:	to 1½ HP											
Capacity:	to 86 GPM											
Head:	to 61 ft.											
Max. solid diameter:	¾"											
Single and three phase models; manual or automatic												
Model DWU, DWXU		Sump, effluent										
	Specifications	Applications										
	<table border="1"> <tr> <td>Discharge Size:</td> <td>2"</td> </tr> <tr> <td>Range of HP:</td> <td>to 3 HP</td> </tr> <tr> <td>Capacity:</td> <td>to 235 GPM</td> </tr> <tr> <td>Head:</td> <td>to 74 ft.</td> </tr> <tr> <td>Max. solid diameter:</td> <td>2"</td> </tr> </table>	Discharge Size:	2"	Range of HP:	to 3 HP	Capacity:	to 235 GPM	Head:	to 74 ft.	Max. solid diameter:	2"	<ul style="list-style-type: none"> <li>• Water</li> <li>• Wastewater</li> <li>• Drainage</li> </ul>
Discharge Size:	2"											
Range of HP:	to 3 HP											
Capacity:	to 235 GPM											
Head:	to 74 ft.											
Max. solid diameter:	2"											
Single and three phase models; manual or automatic												
Model DMLEU, CMLEU		Submersible water/wastewater										
	Specifications	Applications										
	<table border="1"> <tr> <td>Discharge Size:</td> <td>3", 4", 6"</td> </tr> <tr> <td>Range of HP:</td> <td>3 to 30 HP</td> </tr> <tr> <td>Capacity:</td> <td>to 1345 GPM</td> </tr> <tr> <td>Head:</td> <td>to 136 ft.</td> </tr> <tr> <td>Max. solid diameter:</td> <td>3"</td> </tr> </table>	Discharge Size:	3", 4", 6"	Range of HP:	3 to 30 HP	Capacity:	to 1345 GPM	Head:	to 136 ft.	Max. solid diameter:	3"	<ul style="list-style-type: none"> <li>• Commercial/Industrial water and wastewater</li> <li>• Drainage (<i>household, industrial</i>)</li> <li>• Dewatering</li> </ul>
Discharge Size:	3", 4", 6"											
Range of HP:	3 to 30 HP											
Capacity:	to 1345 GPM											
Head:	to 136 ft.											
Max. solid diameter:	3"											
Three phase (only) models available												
Model EBG, EBHG		Submersible grinder										
	Specifications	Applications										
	<table border="1"> <tr> <td>Discharge Size:</td> <td>1¼", 2½", 3"</td> </tr> <tr> <td>Range of HP:</td> <td>to 7½ HP</td> </tr> <tr> <td>Capacity:</td> <td>to 180 GPM</td> </tr> <tr> <td>Head:</td> <td>to 170 ft.</td> </tr> </table>	Discharge Size:	1¼", 2½", 3"	Range of HP:	to 7½ HP	Capacity:	to 180 GPM	Head:	to 170 ft.	<ul style="list-style-type: none"> <li>• Small scale pressurized sewage transfer systems</li> <li>• Drainage transfer</li> <li>• Commercial/household sewage and drainage transfer</li> <li>• Available in packaged basin systems</li> </ul>		
Discharge Size:	1¼", 2½", 3"											
Range of HP:	to 7½ HP											
Capacity:	to 180 GPM											
Head:	to 170 ft.											


# Water/Wastewater



Model DSU, DSHU		Submersible sump	
	Specifications	Applications	
	Discharge Size:	2", 3", 4"	<ul style="list-style-type: none"> <li>• Water</li> <li>• Dewatering</li> <li>• Drainage</li> <li>• Construction</li> </ul>
	Range of HP:	to 10 HP	
	Capacity:	to 390 GPM	
	Head:	to 126 ft.	
Single and three phase models			

Model DVSU, DVSHU		Submersible semi-vortex sewage	
	Specifications	Applications	
	Discharge Size:	2", 3"	<ul style="list-style-type: none"> <li>• Water</li> <li>• Wastewater</li> <li>• Drainage</li> </ul>
	Range of HP:	to 5 HP	
	Capacity:	to 250 GPM	
	Head:	to 90 ft.	
Max. solid diameter:	2 1/4"		
Single and three phase models			


Model DLU		Water/wastewater submersible sump	
	Specifications	Applications	
	Discharge Size:	2", 3", 4"	<ul style="list-style-type: none"> <li>• Sewage</li> <li>• Water</li> <li>• Wastewater</li> <li>• Drainage (household, industrial)</li> <li>• Irrigation</li> </ul>
	Range of HP:	to 5 HP	
	Capacity:	to 400 GPM	
	Head:	to 66 ft.	
Max. solid diameter:	3"		
Single and three phase models			


Model DWP, DWPM		Submersible dewatering	
	Specifications	Applications	
	Discharge Size:	2", 3", 4", 6", 8"	<ul style="list-style-type: none"> <li>• Dewatering</li> <li>• Drainage</li> <li>• Construction</li> <li>• Mining</li> <li>• Power stations</li> <li>• Steel mills</li> <li>• Aquaculture</li> </ul>
	Range of HP:	to 58 HP	
	Capacity:	to 2000 GPM	
	Head:	to 340 ft.	
Single and three phase models			




# Water/Wastewater



Model DVU		Water/wastewater vortex non-clog	
	Specifications		Applications
	Discharge Size:	2", 3", 4"	<ul style="list-style-type: none"> <li>• Water (municipal/industrial)</li> <li>• Wastewater (municipal/industrial)</li> <li>• Sewage</li> <li>• Drainage (household, industrial)</li> <li>• Stock breeding</li> </ul>
	Range of HP:	to 5 HP	
	Capacity:	to 430 GPM	
	Head:	to 66 ft.	
	Max. solid diameter:	4"	
<i>Single and three phase models available</i>			

Model DGUII, DGFU		Submersible grinder	
	Specifications		Applications
	Discharge Size:	1 1/4", 2"	<ul style="list-style-type: none"> <li>• Small scale pressurized sewage transfer systems</li> <li>• Drainage transfer</li> <li>• Commercial/household sewage and drainage transfer</li> </ul>
	Range of HP:	to 5 HP	
	Capacity:	to 80 GPM	
	Head:	to 150 ft.	
	Max. solid diameter:	3"	
<i>Single and three phase models; FM explosion proof available</i>			

Model DLFU		Submersible non-clog water/wastewater	
	Specifications		Applications
	Discharge Size:	2" to 12"	<ul style="list-style-type: none"> <li>• Industrial</li> <li>• Municipal</li> <li>• Water</li> <li>• Wastewater</li> <li>• Flood control</li> </ul>
	Range of HP:	2 to 60 HP	
	Capacity:	to 4000 GPM	
	Head:	to 243 ft.	
	Max. solid diameter:	3 1/4"	
<i>FM explosion proof available</i>			





# Water/Wastewater

## Model DVFU

### Submersible vortex non-clog water/wastewater



#### Specifications

Discharge Size:	2" to 6"
Range of HP:	2 to 30 HP
Capacity:	to 1200 GPM
Head:	to 121 ft.
Max. solid diameter:	5"

#### Applications

- Industrial
- Municipal
- Water
- Wastewater
- Sewage
- Drainage
- Stock breeding

*FM explosion proof available*

## Model DDLFU

### Water/wastewater dry pit non-clog



#### Specifications

Discharge Size:	4" to 12"
Range of HP:	to 60 HP
Capacity:	to 4000 GPM
Head:	to 243 ft.
Max. solid diameter:	3 1/4"

#### Applications

- Industrial
- Municipal
- Water
- Wastewater

*FM explosion proof available*

## Model DSC, DSC4, DSC4C

### Large sewage/wastewater submersible non-clog



#### Specifications

Discharge Size:	6" to 24"
Range of HP:	to 800 HP
Capacity:	to 35,000 GPM
Head:	to 300 ft.
Max. solid diameter:	8 1/8"



#### Applications

- Industrial
- Municipal
- Water
- Wastewater
- Floodwater

*FM explosion proof available; Dry-pit type available; Non-sewage cooled available*



# Control Panels/Drives

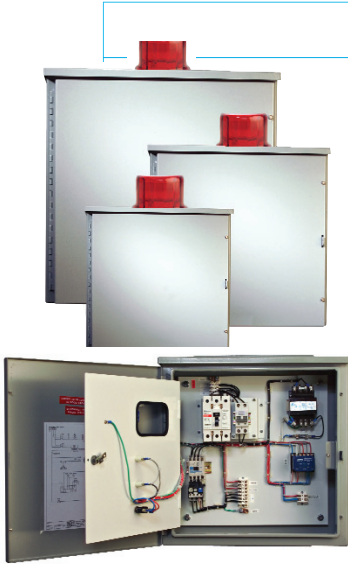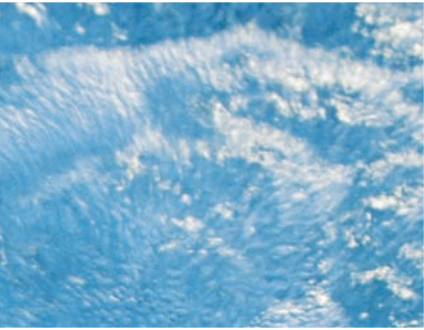

## Control Panels

Basic, Standard or Custom

### Features

- All Nema rated enclosures
- IEC or Nema starters
- Separate alarm and control circuits
- Build to engineers' specifications
- Build to customer specifications
- Components are UL Listed
- UL 508A Certified
- UL 698A Certified

### Applications

- Industrial/Municipal water and wastewater



## Single/Multiple pump flow controller

### Features

- Built-in SCADA software - program, startup, system trending, status readout and diagnose
- Pump applications simulator - simulate drive parameters
- Pump specific operator keypad
- Digital output monitoring
- Simplex - simple setup
- Duplex/Triplex - Automatically starts and stops lead/lag pumps on demand
- Maintains constant system pressure
- Built to UL 508A Standards
- Serial communications options

### Applications

- Booster pump systems
- Commercial/Residential Irrigation
- Submersible deep wells
- Fluid storage tanks
- Metering pumps
- Sludge pumps
- Settling ponds



## StationBoss II

Water/wastewater flow control system

### Features



- Transducer or Float Operation
- User friendly screen operation
- Compatible with most major brands of VFD
- Pump continually trims to system curve
- Unlimited starts per hour
- Allows 3-Phase pumps to be operated from 1-phase power feed
- Controls up to 4 pumps
- Optimum energy controller

### Applications

*Adjust pump flow to meet system requirements, thereby increasing pump station capacity and improve efficiencies*





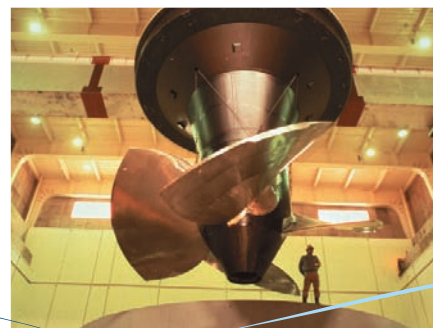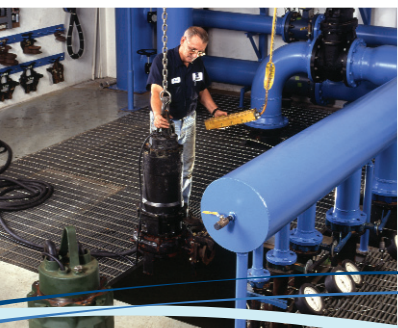

# Engineered for **Performance**



**EBARA** Fluid Handling

1651 Cedar Line Drive, Rock Hill, SC 29730  
t (803) 327-5005 | f (803) 327-5097

[www.pumpsebara.com](http://www.pumpsebara.com)

©2009 EBARA International Corporation, *All rights reserved.*