

## Penn Valley Pump Company, Inc. The World Leader in Free-Diaphragm® Pumping Technology

# Model 6DDSX107 Double Disc Pump™

#### Features and Benefits:

- Patented "Maintain-in-Place" design allows servicing w/out disturbing piping
- Only 5 wetted components
- Self-priming with high suction lifts
- Seal-less design, no stuffing box or mechanical seals, no seal water required
- Runs dry without damage
- No check valves, no fouling problems
- Passes up to 2" solids and line size semi-solids
- No routine maintenance required
- Compact design
- Two (2) year warranty

#### **Technical Specifications:**

| Typical Flow Range: | Up to 600 GPM               |
|---------------------|-----------------------------|
| Displacement:       | 1.07 gallons/revolution     |
| Operating Speeds:   | Up to 400 RPM               |
| Discharge Pressure: | Up to 60psi operating       |
| _                   | Up to 110psi stall pressure |
| Suction Pressure:   | 28ft. lift to 30psi         |
| Connections:        | 6" 150# Flanged             |

#### Materials of Construction:




### The Ultimate in Sludge Pumps<sup>TM</sup>

| Housings:         | Cast iron                  | Optional: | Lined with Hypalon, Neoprene, |  |
|-------------------|----------------------------|-----------|-------------------------------|--|
|                   |                            |           | PVC, Tungsten Carbide, others |  |
| Elastomers:       | Neoprene                   |           | Buna-N, EPDM, Hypalon, HNBR,  |  |
|                   |                            |           | Viton, others                 |  |
| Connecting Rods:  | High-tensile Aluminum      |           |                               |  |
| Drive Shaft:      | High-tensile 400 Series SS |           |                               |  |
| Eccentric Cams:   | High tensile bronze-alloy  |           |                               |  |
| Bearing Pedestals | Aluminum                   |           |                               |  |
| Frame and Covers: | 304SS                      | Optional: | 316SS, Galvanized Steel       |  |

#### Drives:

| Static:          | Electric belt and pulley        | Optional: | Air and Hydraulic motor |
|------------------|---------------------------------|-----------|-------------------------|
| Trailer Mounted: | Electric, Gas and Diesel engine |           |                         |

## 6DDSX107 DOUBLE DISC PUMP™

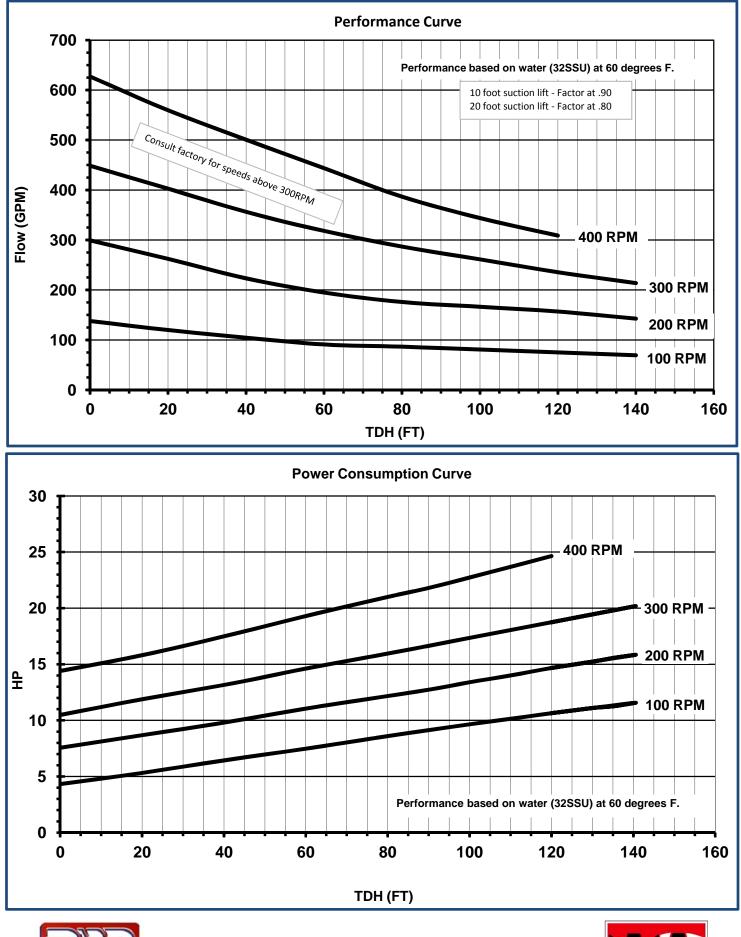



Copyright 2010 Penn Valley Pump Co., Inc. SLS-06-107-03/2012

